



M1H300W

Hybrid Moving Head with CMY, CTO and Zoom

## USER MANUAL



**For safety, please read this user manual carefully before initial use.**

Event Lighting reserves the right to revise the manual at any time. Information and specifications within this manual are subject to change without notice. Event Lighting assumes no liability or responsibility for any errors or omissions. Please consult Event Lighting for any clarification or information regarding this item.

[www.event-lighting.com.au](http://www.event-lighting.com.au)

V1.0

## Safety Instructions

### WARNING

- Do not open this device, there is no user-serviceable parts inside. Risk of electric shock.
- Do not look at the light source when the device is on.
- **CAUTION:** This unit's housing may be hot during and after operation.
- Install this device in a location with adequate ventilation, at least 20 inch (50 cm) from adjacent surfaces.
- Do not leave any flammable material within 50 cm of this unit while operating or connected to power.
- Use a safety chain when mounting this device overhead.
- Do not operate this device outdoors or in any location where dust, excessive heat, water, or humidity may affect it.
- Do not operate this device if the housing, lenses, or cables appear damaged.
- Do not connect this device to a dimmer or rheostat.
- ONLY connect this device to a grounded and protected circuit.
- ONLY use the hanging bracket to carry this device.
- In case of a serious operating problem, stop using immediately.
- The maximum ambient temperature is 104° F (40° C). Do not operate this device at higher temperatures.

### Power Input & Power Linking

This device has an auto-switching power supply work with input voltage range of 100~240 VAC, 50/60 Hz.

Link up to the maximum 15A. DO NOT exceed this.

### Fuse Replacement

If the fine-wire fuse of the device fuses, only replace the fuse by a fuse of same type and rating.

Before replacing the fuse, unplug mains lead.

#### Procedure:

Step 1: Unscrew the fuse holder on the rear panel with a fitting screwdriver from the housing (anticlockwise).

Step 2: Remove the old fuse from the fuse holder.





Step 3: Install the new fuse in the fuse holder.

Step 4: Replace the fuse holder in the housing and fix it.

## Product Installation







This device can be mounted in many orientations provided each individual device is secured by the use of correct mounting bracket.


Use a safety chain when mounting this device overhead.

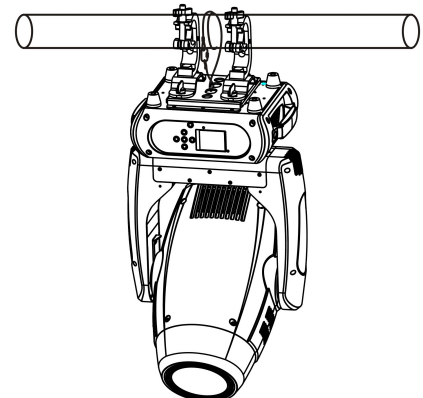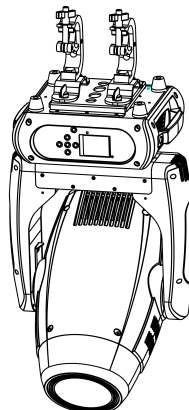

## Product appearance, LUX chart, Dimensions

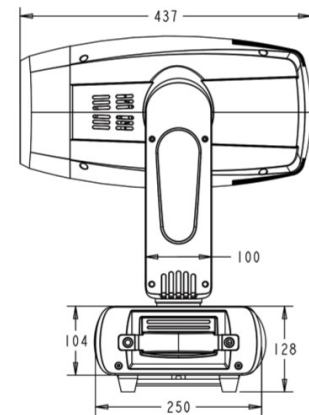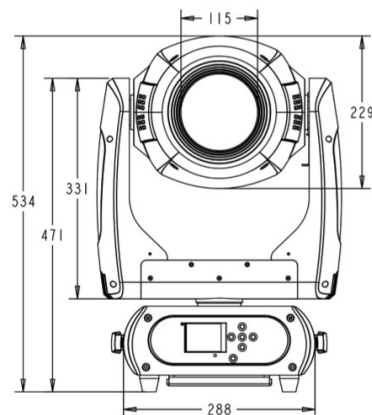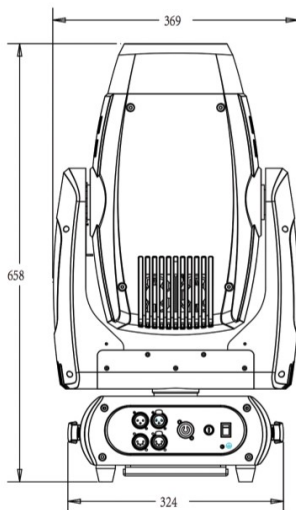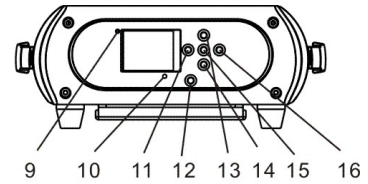








1. Project lens
2. Head
3. Arm
4. Base
5. Display
6. Foot stand
7. Operation button
8. Handle
9. Wireless indicator
10. Mic
11. Left button
12. Battery indicator
13. Up button
14. Down button
15. Enter button
16. Right button
17. 3-pin DMX in
18. 5-pin DMX in
19. 3-pin DMX out
20. 5-pin DMX out
21. Powercon in
22. Fuse
23. Power switch

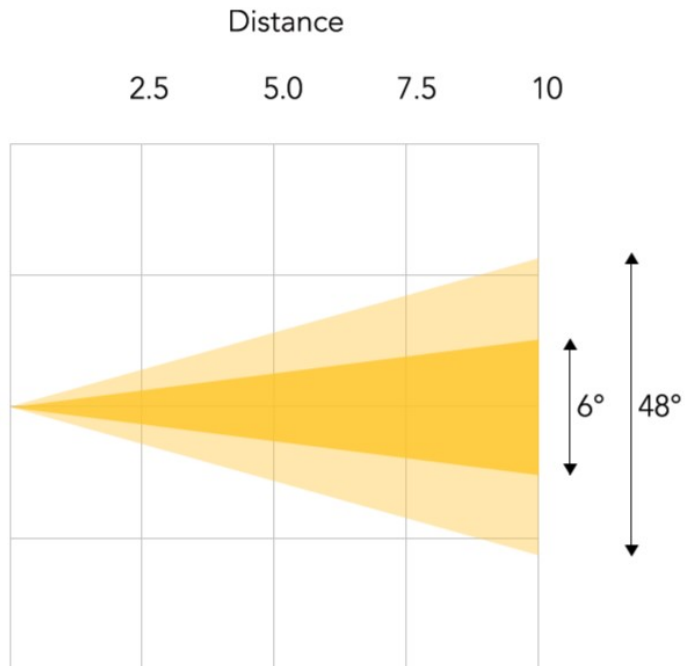





LUX @ 6°	Ø 0.26	Ø 0.52	Ø 0.79	Ø 1.05
	89,700	22,550	10,190	5,811
LUX @ 48°	Ø 2.23	Ø 4.45	Ø 6.68	Ø 8.9
	4,230	1,419	640	406

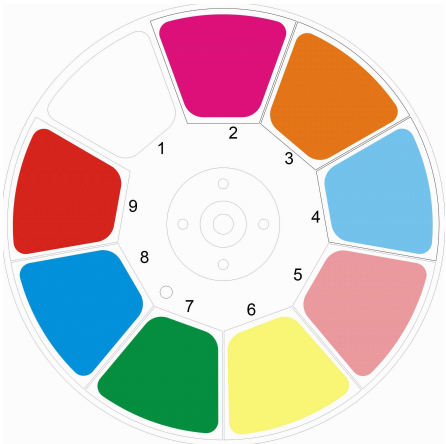




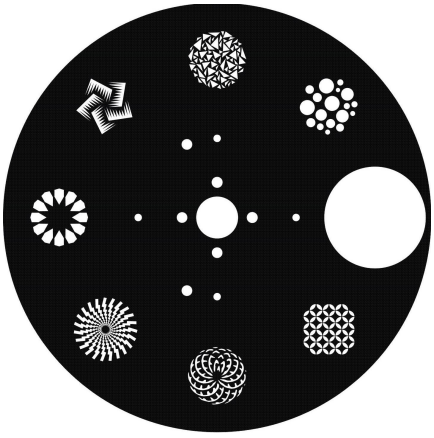


## Colour wheel

	1	Open	
	2		Magenta
	3		Orange
	4		Sky blue
	5		Pink
	6		Yellow
	7		Green
	8		Blue
	9		Red









## Gobo wheel

Static gobo wheel	Rotating gobo wheel (slot-in-out gobos)
	

## Rotating gobo wheel

	Position 1
	Position 2
	Position 3
	Position 4
	Position 5
	Position 6
	Position 7
	Position 8

## Static gobo wheel

	Position 1
	Position 2
	Position 3
	Position 4
	Position 5
	Position 6
	Position 7
	Position 8

## Menu operation

Description of icons in the menu

CONNECT	LIGHT	INFOMATION	SET	PROGRAM
				

## Menu

Default setting shadowed. Mark with ① can be basic reloaded, ② be program reloaded, ③ can be private reloaded.

Connect	DMX Address①	XXX	DMX address setting
	Wireless①		Wireless Enabled
Light	Max Temperature①	80~139°C <b>80°C</b> /176~282°F <b>176°F</b>	Lamp off if temperature continuously over for 5 minutes
	Lamp Adjust①	PAN.....	Adjust value of channel
Information	Time Info.	Current XXXX(Hours) Fixture Life XXXX(Hours)	Fixture boot time Fixture total run time
	Temperature	Near Lamp Temp (depends on fixture)	Temperature Sensors
	Fans Speed	Near Lamp Fan (depends on fixture)	Fan speed Sensors
	Channel Value	PAN.....	Display value of channel
	Error Message	Pan,Tilt.....	Error channels
	Fixture Model	xxxxxxxxxxxx	Display model brand and model
	Software Ver	1U01 V1.0.00.....	Version of each IC
Set	Reset	All Pan&Tilt Colors Gobos Others	Reset all Reset Pan & Tilt Reset Colors Reset Gobos Reset Others
	Movement	Pan Reverse① Tilt Reverse① Pan Degree① Encoders① Pan/Tilt Mode①	<b>ON/OFF</b> <b>ON/OFF</b> <b>630/540</b> <b>ON/OFF</b> <b>Stand/Smooth</b>
	UI Set	Mic Sens. ③ No Signal① Temperature. C/F① Fans Mode① Hibernation① Backlight① Flip Display①	0~99%, <b>60%</b> Close/ <b>Hold</b> /Auto/Music Fahrenheit/ <b>Celsius</b> <b>Auto Speed</b> /High Speed OFF, 01M~99M, <b>15M</b> 02~60m <b>02m</b> <b>ON/OFF</b>



	Display Bright <sup>③</sup> Brand Show <sup>①</sup> Key Lock <sup>①</sup> Language <sup>③</sup>	00~31 10 ON/OFF ON/OFF En/简/繁/Fr/Sp	Display Brightness Show brand or not Key lock on/off Language Select	
Users	User Mode <sup>①</sup>	Standard Extended Basic-8bit Basic-16bit User	Standard mode Extended mode Basic-8bit mode Basic-16bit mode User program mode	
	Edit User <sup>③</sup>	Max Channel = XX PAN = CH01 :	Edit users mode	
Calibration <sup>③</sup>	-Password- Color :	=XXX =XXX :	Password: 050 Calibrate channel value	
Fixture ID <sup>③</sup>	Name -Password- PID Code		Name Password: 050 Set PID of RDM	
Wireless Set <sup>①</sup>	DMX On Cable Reset Connect	ON/OFF ON/OFF	DMX Send Out Reset Connect	
Reload Default	Basic Reload <sup>①</sup> Program Reload <sup>②</sup> ---Password--- Private Reload <sup>③</sup> All Reload	ON/OFF ON/OFF XXX ON/OFF ON/OFF	Basic Reload Program Reload Password: 050 Private Reload All Reload	
Program	Play <sup>①</sup>	DMX Receive Slave Receive Sequence Music	Slave Receive 1,2,3 Master / Alone Master / Alone	DMX Receive Choose slave position Run Sequence Music mode
	Select Chase <sup>②</sup>	Chase Part 1 Chase Part 2 Chase Part 3	Chase 1 ~ 8 Chase 1 Chase 1 ~ 8 Chase 2 Chase 1 ~ 8 Chase 3	Select and run auto program
	Edit Chase <sup>②</sup>	Chase 1 : Chase 8	Chase Test Step 01 =SCxxx Step 64 =SCxxx	Test Beginning scene Ending scene
	Edit Scenes <sup>②</sup>	Edit Scene 001 ~ Edit Scene 250	Pan,Tilt,..... --Fade Time-- =xxx --Scene Time-- =xxx DMX Input	Input manual scene Modify manually fading time Modify manually scene time Input scene from exterior controller
	Scenes Record	ScXX=>ScXX		Auto Input scenes

## DMX Chart

Channel				name	function	Min DMX	Max DMX
St	Ex	Ba1	Ba2				
1	1	1	1	Pan	Pan Coarse	0	255
	2		2	Pan fine	Pan Fine	0	255
2	3	2	3	Tilt	Tilt Coarse	0	255
	4		4	Tilt fine	Tilt Fine	0	255
3	5	3	5	Movement Speed	fastest to Slowest	0	255
	6			Movement Function	Normal	0	15
					Movement With Blackout	16	31
					TBD	32	255
4	7			Shutter Function	Normal Shutter Functions	0	15
					Pulse-effect Forward	16	31
					Pulse-effect Reverse	32	47
					Random Strobe	48	63
					TBD	64	255
5	8			Shutter	<b>Normal Shutter Functions</b>		
					Close	0	31
					Strobe Rate (slow to fast)	32	223
					Open	224	255
					<b>Pulse-effect Forward</b>		
					Close	0	31
					Strobe Rate (slow to fast)	32	223
					Open	224	255
					<b>Pulse-effect Reverse</b>		
					Close	0	31
					Strobe Rate (slow to fast)	32	223
					Open	224	255
					<b>Random Strobe</b>		
					Close	0	31
					Strobe Rate (slow to fast)	32	223
		Open	224	255			
		4	6	Shutter	Shutter closed	0	31
					No function (shutter open)	32	63
					Strobe effect slow to fast	64	95
					No function (shutter open)	96	127
					Pulse-effect in sequences	128	159
					No function (shutter open)	160	191
					Random strobe effect slow to fast	192	223
					No function (shutter open)	224	255
6	9	5	7	Dimmer	Dimmer(Close to Open)	0	255

7	10			Colour Function	Indexed	0	15
					Indexed With Blackout	16	31
					Forward Spin	32	47
					Reverse Spin	48	63
					Continuous	64	79
					Colour Bounce	80	111
					TBD	112	255
8	11			Colour	Indexed & Indexed With Blackout & Colour Bounce		
					Position 1 (Open)	0	13
					Position 2 ~ Position 18	14	255
					Forward Spin		
					Stop to fastest	0	255
					Reverse Spin		
					Stop to fastest	0	255
					Continuous		
Positioning from 0-360 degrees	0	255					
		6	8	Colour	Indexed		
					Position 1 (Open)	0	2
					Position 2 ~ Position 18	3	53
					Indexed With Blackout		
					Position 1 (Open)	54	56
					Position 2 ~ Position 18	57	106
					Indexed With Bounce		
					Position 1	107	119
					Position 2 ~ Position 9	120	223
					Forward Wheel Spin		
					Stop to fastest	224	239
					Reverse Wheel Spin		
					Stop to fastest	240	255
9	12	7	9	Cyan	Cyan 0->100%	0	255
10	13	8	10	Magenta	Magenta 0->100%	0	255
11	14	9	11	Yellow	Yellow 0->100%	0	255
12	15	10	12	CTO	CTO 0->100%	0	255
13	16			Rot Gobo Function	Indexed	0	15
					Indexed With Blackout	16	31
					Forward Spin	32	47
					Reverse Spin	48	63
					Continuous	64	79
					Shake	80	95
					TBD	96	255
14	17			Rot Gobo	Indexed & Indexed With Blackout & Shake		
					Position 1 (Open)	0	31
					Position 2 ~ Position 8	32	255
					Forward Wheel Spin		

					Stop to fastest	0	255
					Reverse Wheel Spin		
					Stop to fastest	0	255
					Continuous		
					Positioning from 0-360 degrees	0	255
					Indexed		
					Position 1 (Open)	0	5
					Position 2 ~ Position 8	6	47
					Indexed With Blackout		
					Position 1 (Open)	48	53
					Position 2 ~ Position 8	54	97
					Indexed With Shake		
					Position 2	98	115
					Position 3 ~ Position 8	116	223
					Forward Wheel Spin		
					Stop to fastest	224	239
					Reverse Wheel Spin		
					Stop to fastest	240	255
					Continuous	0	15
					Forward Spin	16	31
					Reverse Spin	32	47
					Forward Animate Rotate	48	63
					Forward Animate Rotate With Blackout	64	79
					Reverse Animate Rotate	80	95
					Reverse Animate Rotate With Blackout	96	111
					TBD	112	255
					Continuous		
					Positioning from 0-360 degrees	0	255
					Forward Spin		
					Stop to fastest	0	255
					Reverse Spin		
					Stop to fastest	0	255
					Forward Animate Rotate & Forward Animate Rotate With Blackout		
					Stop to fastest	0	255
					Reverse Animate Rotate & Reverse Animate Rotate With Blackout		
					Stop to fastest	0	255
					Continuous		
					Positioning from 0-360 degrees	0	191
					Forward Animate Rotate		
					Stop to fastest	192	207
					Reverse Animate Rotate		
					Stop to fastest	208	223

					<b>Forward Spin</b>		
					Stop to fastest	224	239
					<b>Reverse Spin</b>		
					Stop to fastest	240	255
17	20			Gobo Function	Indexed	0	15
					Indexed With Blackout	16	31
					Forward Spin	32	47
					Reverse Spin	48	63
					Continuous	64	79
					Shake	80	95
					TBD	96	255
18	21			Fixed Gobo	<b>Indexed &amp; Indexed With Blackout &amp; Shake</b>		
					Position 1 (Open)	0	31
					Position 2 ~ Position 8	32	255
					<b>Forward Wheel Spin</b>		
					Stop to fastest	0	255
					<b>Reverse Wheel Spin</b>		
					Stop to fastest	0	255
					<b>Continuous</b>		
					Positioning from 0-360 degrees	0	255
		13	15	Fixed Gobo	<b>Indexed</b>		
					Position 1 (Open)	0	5
					Position 2 ~ Position 8	6	47
					<b>Indexed With Blackout</b>		
					Position 1 (Open)	48	53
					Position 2 ~ Position 8	54	97
					<b>Indexed With Shake</b>		
					Position 2	98	115
					Position 3 ~ Position 8	116	223
					<b>Forward Wheel Spin</b>		
					Stop to fastest	224	239
					<b>Reverse Wheel Spin</b>		
					Stop to fastest	240	255
19	22	14	16	Prism	<b>Indexed &amp; Indexed With Blackout</b>		
					Position 1 (Open)	0	84
					Position 2	85	169
					Frost 0->100%	170	255
20	23	15	17	Prism Rot	<b>Forward Spin</b>		
					Stop to fastest	0	127
					<b>Reverse Spin</b>		
					Stop to fastest	128	255
21	24			Focus Function	Continuous	0	15
					5m Auto Focus	16	31
					7.5m Auto Focus	32	47

					10m Auto Focus	48	63
					15m Auto Focus	64	79
					>20m Auto Focus	80	95
					TBD	96	255
22	25	16	18	Focus	<b>Continuous</b>		
					Focus In to Focus Out	0	255
					<b>Auto Focus</b>		
					Focus In to Focus Out Fine	0	255
23	26	17	19	Zoom	<b>Continuous</b>		
					Zoom Small to Big	0	255
24	27			Iris Function	Indexed	0	15
					Pulse opening With Forward Blackout	16	31
					Pulse opening With Reverse Blackout	32	47
					Pulse closing With Forward Blackout	48	63
					Pulse closing With Reverse Blackout	64	79
					TBD	80	255
25	28			Iris	<b>Indexed</b>		
					Max. diameter to Min. diameter	0	255
					<b>Pulse opening &amp; Pulse closing</b>		
					Pulse Slow to Fast	0	255
		18	20	Iris	Indexed	0	191
					Pulse opening With Forward Blackout	192	207
					Pulse opening With Reverse Blackout	208	223
					Pulse closing With Forward Blackout	224	239
					Pulse closing With Reverse Blackout	240	255
26	29	19	21	Control	Normal	0	7
					Reset All	8	15
					Pan & Tilt Reset	16	23
					Color Reset	24	31
					Gobo Reset	32	39
					TBD	40	47
					Other Reset	48	55
					Display Off	56	63
					Display On	64	71
					TBD	72	79
					TBD	80	87
					Hibernation	88	95
					TBD	96	255

- The device is controlled by universal DMX 512 protocol, DMX address is the start channel used to receive instructions from the external controller. For independent control, each fixture must be assigned its unique address control channels. For example, this device has four channel modes: 26/29/19/21, if we set the mode at standard 26 channels mode, and there are several models need to be independently controlled, we just simply address first fixture at 1, and second fixture at 27, third one at 53, etc.

- 
- If the devices have the same address, they will behave synchronically.
  - Display is flashing when no DMX signal is received.

## More functions

- RDM. RDM stands for "Remote Device Management", with this function, users can realize remote control of the device, such as remotely changing DMX address, reverse pan/tilt setting, check a lot of useful information such as temperature, power consumption, fan speed. Etc. Every single device has a unique RDM code programmed at manufacture to distinguish from each other. It is not recommended for users to change this code.
- Software upgrade function via DMX cable. If there is any new firmware for this device, it can be upgraded simply via a software upgrade box, no need to change any mechanical parts. The upgrade box is not included in the package, if need any further assistance please just contact your authorized dealer.
- Hibernation. The device will enter sleeping mode if activated after a period of disconnecting DMX signal to save the power consumption, and will return immediately as soon as the DMX signal is sent again.
- Display back-up communication IC. There is a back-up communication IC installed in the display PCB, so users could replace at once if the original one is broken.
- Display flip. By press up and down button for more than 3 seconds, the display will flip automatically, this function is useful to read menu conveniently when device is hanged.

## Technical Specifications

### Power

- Input Voltage: 100~240V AC, 50/60 Hz
- Power Consumption: 420W
- Connection: Neutrik® PowerCON – In

### Photometric

- Light Source: Advanced 6500K 300W White LED Module
- Beam Angle: 6° to 48°
- Output: 18000 lumen, 89700 lux on @2.5M
- PWM: 1200Hz
- LED Lifespan: 60,000 hours

### Effects

- Dimming: 0 ~ 100%
- Strobe: 0.5 ~26 Hz
- Focus: Linear via DMX
- Prism: 3 Facet & Frost
- Iris: Yes
- Zoom: Linear via DMX 6° to 48°
- Movement 8 / 16 bit Auto Reposition
- Pan: 630°( 4.0 sec) or 540°( 3.58 sec)
- Tilt: 265°(2.8 sec)

### Colour

- Liner CMY & CTO
- 8 Colours + Open

---

**Gobos**

- Fixed: 1 x 7 + Open Fixed Gobo Wheel
- Rotating: 1 x 7 + Open Interchangeable Rotating Gobo Wheel (Outside Ø27mm, Inside Ø20mm).

**Control**

- Operational Modes: DMX, Auto Program, Sound Active, Master / Slave
- RDM: Change DMX Address, Display Flip, X/Y Reverse and so on
- Protocol: DMX512 (W-DMX™ Optional)
- DMX Channels: 26 / 29 / 19 / 21
- Interface: 3-Pin & 5-Pin XLR
- Display: 2.4" Colour LCD Control Panel with Back-up Power.
- Software Upgrade via DMX: Yes

**Housing**

- Materials: ABS & Steel
- Finishing: Matte black
- Cooling: Multi Sensor Thermostat Controlled Variable Speed Fan
- IP rating: IP20
- Dimension: 369 x 437 x 658 mm
- Net Weight: 18 kg
- Rigging: 2pcs Omega Brackets with 1/4-turn Quick Locks

**MISC**

- Road case: MCASE1LS (fit 1 unit) MCASE2VLS (fit 2 units)

## **WARRANTY**

**Please refer to your local dealer or please contact Event Lighting Pty Ltd**

**Website: [www.event-lighting.com.au](http://www.event-lighting.com.au).**