


DELUGE24X12 H / BH

24 X 12 W RGBWAU OUTDOOR LED WASHER / BATTERY OPERATED

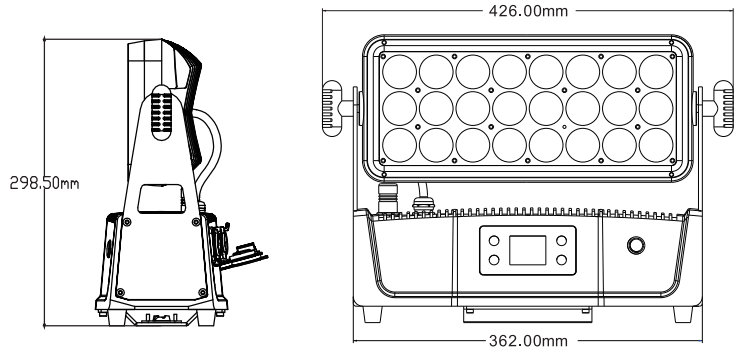

Photometrics	Light Source: 24x12W RGBWA UV LED
Beam Angle	30°
Tilt	Manual rotation of 130°
PWM	20,000 Hz
LED Lifespan	50,000 hours
Effects	
Dimming	0-100%
Strobe	1-20 Hz
Control	DMX512, 2.4G Wireless DMX
DMX Channel	6/11
Display	LCD display with 4 touch buttons
Connection	Interface: 5-pin DMX in/out outdoor
	Power: Seetronic, IP65 PowerCon input/output
Power	Input Voltage: 100~240V AC, 50/60 Hz
	MAX Power Consumption: 288W
	Battery: 24000 mAh, 24V
	Battery charging time: 6.5 hours from 0-100%
Housing	Die-cast aluminum, black
Protect grade	IP65
Cooling	Natural heat dissipation
Size	426x138x299mm
Weight	10.7 kg

Lux	1m	2m	3m	4m	5m
R	3,160	870	410	245	168
G	5,870	1,700	782	460	312
B	10,600	3,200	1,388	830	550
W	8,300	2,460	1,080	650	430
A	3,040	870	412	246	160
UV	2,420	732	350	212	140
FULL	27,000	7,680	3,820	2,200	1,410



Accessories included:

1 x omega bracket with 1/4 - turn quick locks



DELUGE24X12H with omega bracket attached for rigging



Optional Accessories

DEL24BD

Barndoor to suit DELUGE24X12H, DELUGE24X12BH fixtures



DEL24DIF40

DEL24DIF40 - 40° Diffuser in frame with safety wire to suit DELUGE24X12H, DELUGE24X12BH fixtures



DEL24DIF60X25

DEL24DIF60X25 - 60 x 25° Diffuser in frame with safety wire to suit DELUGE24X12H, DELUGE24X12BH fixtures



Road Case (Optional)

DEL24CASE4

Road case to suit 4 units of DELUGE24X12H



Road Case (Optional)

DEL24CASE4C

Charging Road case to suit 4 units of DELUGE24X12BH

