
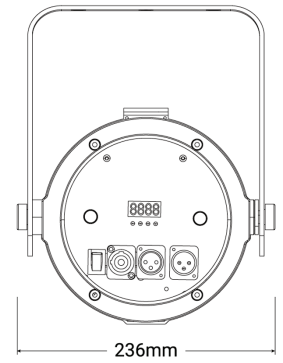


# F2X100VWL

VARIABLE COLOUR FRESNEL

**EVENT LIGHTING** *lite*

PROFILES

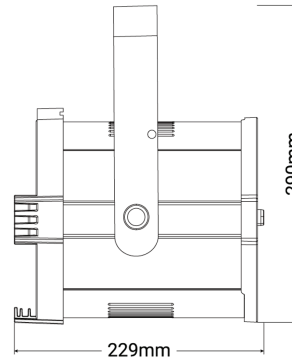

Photometrics	
Light Source	100W Warm White + 100W Cool White COB LED
Beam Angle	25° – 65°
Output	— Warm white: 785lux @5m 25° — Cool white: 1080lux @5m 25°
Color temperature	2,700K – 6,000K optional
LED Lifespan	50,000 hours
Effects	
Dimming	0–100%
Strobe:	Variable speed and action, random strobe
Zoom:	Manual 25°–65°
Power	
Input Voltage	100–240 V AC, 50/60 Hz, 100 W
Connection	PowerCON in/out
Control	
Operation Modes	DMX, RDM, stand-alone
Control Protocol	DMX512
DMX Channels	1 / 2 / 3 / 5
Control Interface	3-pin XLR in/out
RDM compliance	ANSI/ESTA E1.20
RDM function	Available for addressing and settings
Display	LCD control panel with four buttons
Housing	
Housing Materials	Aluminum, matte black finish
Housing Finishing:	Matte Black or White
Cooling	Fanless Cooling with Temperature Protection
Net Weight	2.3 kg
Barn Door	Included
Gel Frame	Included



Lux @ 25°	F2X100VWL				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.55	Ø1.11	Ø1.66	Ø2.22	Ø2.77
<b>WW</b>	16,700	5,560	2,230	1,280	785
<b>CW</b>	23,700	7,530	2,980	1,750	1,080
<b>FULL</b>	19,000	6,260	2,530	1,490	853

Lux @ 65°	F2X100VWL				
	Ø1.7	Ø3.4	Ø5.1	Ø6.8	Ø8.5
<b>WW</b>	4,170	1,390	547	318	214
<b>CW</b>	5,670	1,860	734	437	360
<b>FULL</b>	4,680	1,580	621	361	240

F2X100VWL