


HAVOCH200 [-WH]

HYBRID MOVING HEAD

EVENT
LIGHTING

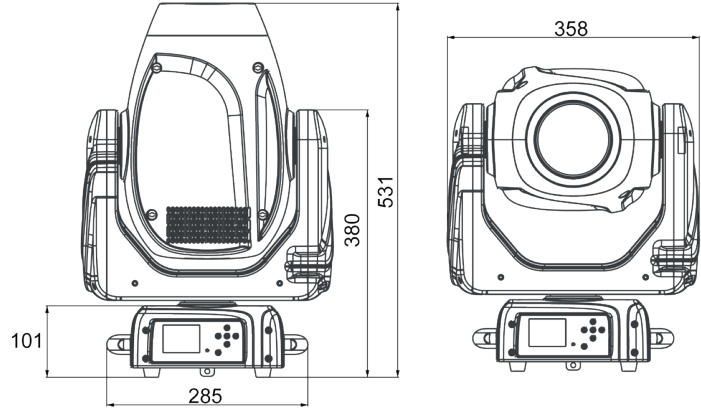

Photometrics

Light Source:	200w LED White
Beam Angle:	4°-30.8°
Output:	6,940 lumen, 65,166 lux @ 5m at 4°
Led lifespan:	60.000 hours

Colour

11 Colours + Open
Indexable and bideractional rainbow effect
Colour bounce

Gobos

Fixed:	17 + Open
Rotating:	8+ Open
Animation:	Yes

Effects

Dimming:	0-100%
Strobe:	Yes
Focus:	Motorised
Prism:	5 facets
Frost:	Yes
Zoom:	Yes (4° to 30.8°)

Power

Power consumption:	292W Max.
Input Voltage:	100-240 V AC, 50/60 Hz
Connection:	True1 in/out

Control

Control Protocol:	DMX512, RDM, optional Art-Net, optional CRMX
DMX Channels:	20
Interface:	3-pin / 5-pin XLR in/out, RJ45 in/out
RDM:	function to change DMX address
Display:	2.4" colour LCD control panel
Software Upgrade:	Yes, via DMX or USB


Housing

Materials:	ABS & Steel, matte black or white finish
Dimensions:	531x258x345mm
Cooling:	Multi sensor thermostat controlled variable speed fan
IP rating:	IP20
Net Weight:	15 kg

Colour wheel



Fixed gobo wheel

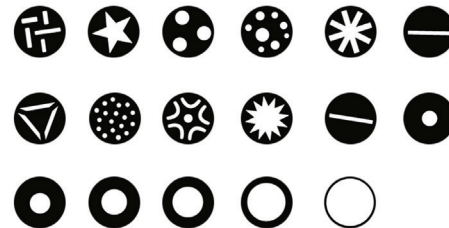

Rotating gobo wheel



Lux

	2.0m	5.0m	7.5m	10.0m
@ 4°	Ø0.27	Ø0.70	Ø1.05	Ø1.40
	380,263	60,842	27,041	15,211
@ 30.8°	Ø2.38	Ø5.96	Ø8.94	Ø11.92
	7,885	1,262	561	315

Road Case (Optional)

HAVOCH200CASE2
Road case to suit 2 units
of HAVOCH200

