



IPBAR

ARCHITECTURAL BARS

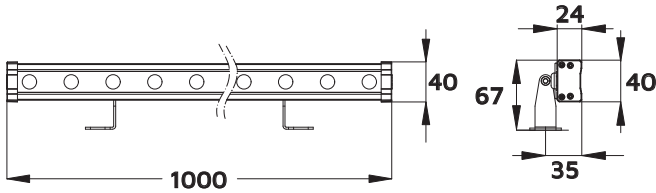



IPBAR A

LED	1 W RGB 3-in-1/1 W RGBW 4-in-1
Length (m)	0.3/0.5/1
Section Control	Available
Beam Angle	8°/15°/30°/45°/60°/10x60°
Control	DMX512
IP Rating	IP67
Optional Accessories	External 24 V power supply, external programmer and controller, extension cables

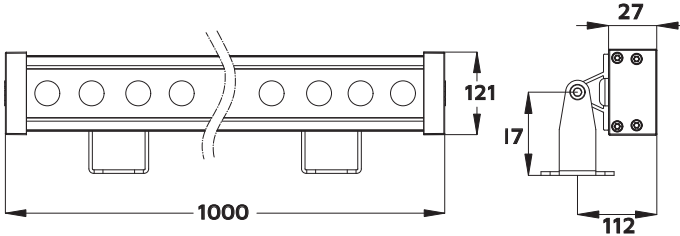

IPBAR B

LED	1 W RGB 3-in-1/1 W RGBW 4-in-1
Length (m)	0.3/0.5/1
Section Control	Available
Beam Angle	8°/15°/30°/45°/60°/10x60°
Control	DMX512
IP Rating	IP67
Optional Accessories	External 24 V power supply, external programmer and controller, extension cables

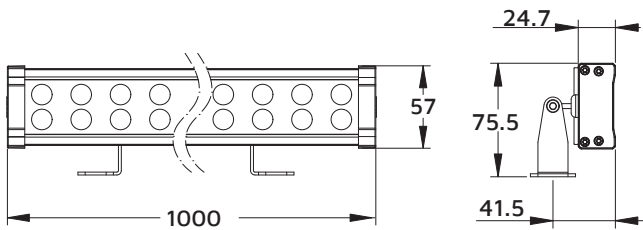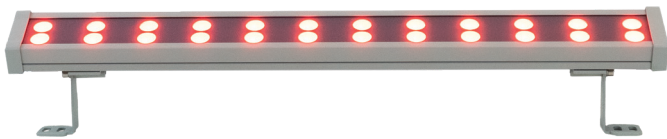

IPBAR C

LED	1 W RGB 3-in-1/1 W RGBW 4-in-1
Length (m)	0.3/0.5/1
Section Control	Available
Beam Angle	8°/15°/30°/45°/60°/10x60°
Control	DMX512
IP Rating	IP67
Optional Accessories	External 24 V power supply, external programmer and controller, extension cables

