
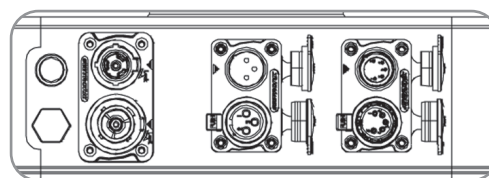
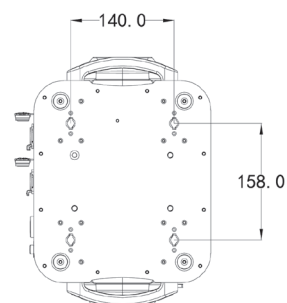
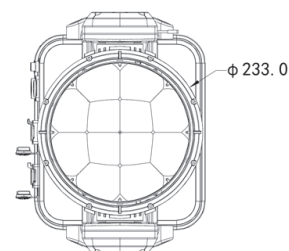
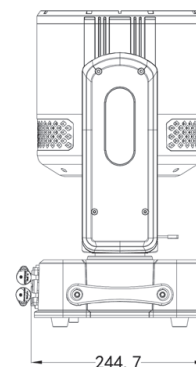


# OUTBACK12X40W / OUTBACK12X40W-WH

## OUTDOOR WASH MOVING HEAD

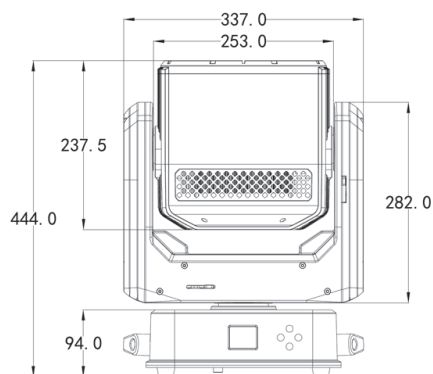

### Photometrics

Light Source	12 x 40W RGBW 4-in-1 LEDs
Beam Angle	3° - 25°
Zoom Angle	3° - 45°
Output	34,250 lux@ 5m at 3° 1,235 lux@ 5m / 16.4ft at 45°

CCT	2,500 - 10,000K
CRI	>70
LED Lifespan	>20,000 hours

### Effects

Dimming	0~100%
Pixel Control	Yes
Strobe	1 - 25 Hz
Zoom	Motorised, 3° - 45°
<b>Movement</b>	16-bit auto reposition
Pan	540°
Tilt	270°

### Power

Input Voltage	100~240 V AC, 50/60 Hz, 560 W
Connection	True1 in/out

### Control

Operation Modes	DMX, auto, sound active, master/slave
Control Protocol	DMX512, RDM
DMX Channels	12 / 58
Control Interface	3-pin & 5-pin XLR in/out
Display	TFT control panel

### Housing

Housing Materials	ABS and steel, matte black or white finish
Protection	High temperature automatic protection
IP rating	IP65
Dimensions:	337 x 240 x 474mm
Net Weight	11 kg

Lux @ 3°	5.0m	10.0m	15.0m	20.0m
	Ø0.27	Ø0.52	Ø0.8	Ø1.05
Full	34,250	7,658	3,415	2,013

Lux @ 45°	5.0m	10.0m	15.0m	20.0m
	Ø4.1	Ø8.3	Ø12.4	Ø16.5
Full	1,235	346	186	123

### Road Case (Optional)

#### OUTBACK12X40WCASE2

Road case to suit 2 units of HAVOCW19X40

