
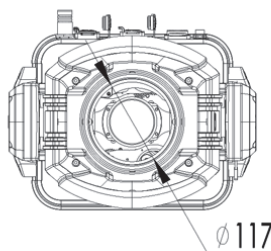


OUTBACK350H / OUTBACK350H-WH

OUTDOOR MOVING HEAD HYBRID

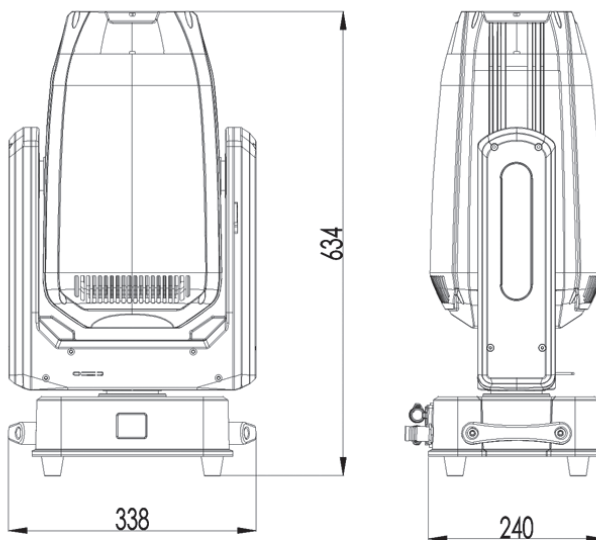

Photometrics

Light Source:	350W LED White
Beam Angle:	3° - 38°
Output:	69,703 lux @ 5m at 3°
Led lifespan:	>20,000 hours

Colour

	5 Colour + Open (first wheel)
	5 Colour + Open (second wheel)
	Colour Mixing: CMY + CTO

Gobos

Rotating:	7 + Open (first wheel)
Rotating:	7 + Open (second wheel)
Gobo Shaking:	Yes
Gobo Indexing:	Yes

Effects

Dimming:	0~100%
Strobe:	1 - 25 Hz
Zoom:	Motorised 3° to 38°
Prism:	Prism(1): 4-Facet circular prism, indexing Prism(2): 4-Facet linear prism, indexing
Frost:	Yes

Movement

	16 bit resolution
	Auto repositioning
Pan:	540°
Tilt:	270°

Power

Power consumption:	500W Max.
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out

Control

Control Protocol:	DMX512, RDM
DMX Channels:	27 / 30
Interface:	3-pin & 5-pin XLR in/out
Display:	TFT control panel

Housing

Materials:	ABS & Steel, matte black or white finish
Protection:	High temperature automatic protection
IP rating:	IP65
Dimensions:	338 x 240 x 621mm
Net Weight:	20 kg

Lux

	5m	10m	15m	20m
@ 3°	Ø0.27 69,703	Ø0.52 16,072	Ø0.8 7,167	Ø1.05 3,897
@ 38°	Ø3.55 2,538	Ø6.92 646	Ø10.4 286	Ø13.8 163


Colour wheel (1)




Colour wheel (2)



Rotating gobo wheel (1)



Rotating gobo wheel (2)

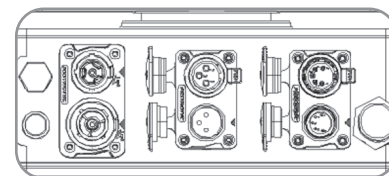

Road Case (Optional)

OUTBACK350HCASE1

Road case to suit 1 unit of OUTBACK350H

