



PAN8X1X30 / PAN4X1X30

8 / 4 x 30 W COB RGB LED PIXEL CONTROL PANEL

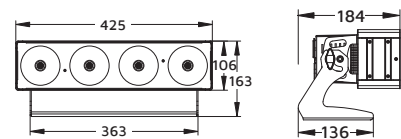

PAN BARS

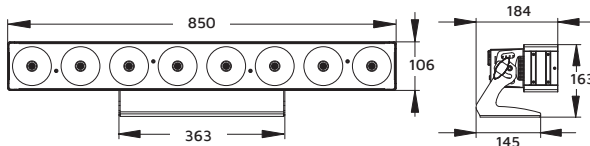

	PAN8X1X30	PAN4X1X30
Photometric		
Light Source	8x 30 W RGBW COB LEDs	4x 30 W RGBW COB LEDs
Beam Angle	60°	
Output	1,972 lux @ 2 m	968 lux @ 2 m
PWM	11,700 Hz	
LED Lifespan	50,000 hours	
Effects		
Dimming	0~100%, 8-bit + 4x 16-bit dimming curves	
Strobe	1~30 Hz	
Power		
Input Voltage	100~240 V AC, 50/60 Hz	
Power Consumption	200W	120 W
Connection	IEC in/out	
Control		
Operation Modes	DMX, manual, auto, sound active, master/slave, multi fixture chase	
Control Protocol	DMX512	
DMX Channels	3/5/9/24/29	3/5/9/12/17
Control Interface	5-pin XLR	
Display	4-button LCD control panel	
Housing		
Housing Materials	Aluminium	
Housing Finish	Matte black	
Cooling	Fanless cooling with temperature control	
IP Rating	IP20	
Net Weight	6.2 kg	4 kg
Accessories		
Optional	Road Case: PAN8X1CASE4WC	Road Case: PAN4X1CASEWC



Lux	PAN8X1X30				
	1.0m	2.0m	3.0m	4.0m	5.0m
@ 60°	Ø1.15	Ø2.31	Ø3.46	Ø4.62	Ø5.77
R	2,052	627	326	198	132
G	1,848	590	293	179	121
B	2,039	649	323	192	130
Full	6,090	1,972	1,004	613	422

Lux	PAN4X1X30				
	1.0m	2.0m	3.0m	4.0m	5.0m
@ 60°	Ø1.15	Ø2.31	Ø3.46	Ø4.62	Ø5.77
R	943	285	135	76	52
G	1,028	308	149	85	57
B	1,040	320	151	85	56
Full	2,920	968	418	239	159

Road Case (Optional)

PAN8X1CASE4WC

Road Case to suit 4 units of PAN8X1X30



Road Case (Optional)

PAN4X1CASEWC

Road Case to suit 4 units of PAN4X1X30

