



PANX22 / PANX22-WH

INDOOR PIXEL PANEL

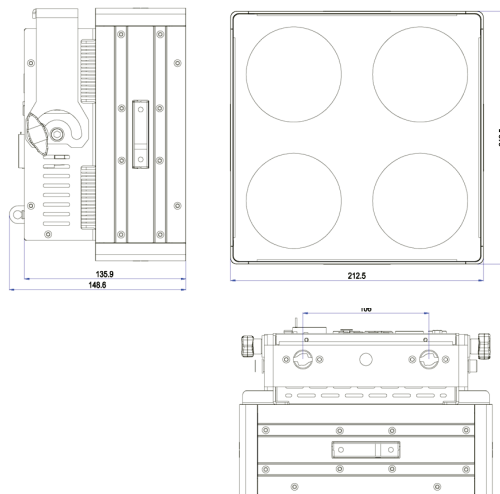

Photometrics	
Light Source:	2 x 2 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	1,965 lux @ 2m full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
Effects	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
Power	
Power consumption:	120W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
Control	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 / 22
Interface:	3-pin and 5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
Housing	
Materials:	Aluminium, matte black or white finish
Cooling:	Fanless
IP rating:	IP20
Dimensions:	213 x 213 x 136 mm
Net Weight:	3.85 kg
Rigging:	1x Omega bracket with 1/4 turn quick locks Coffin Latch - All Sides with Hex key (included)

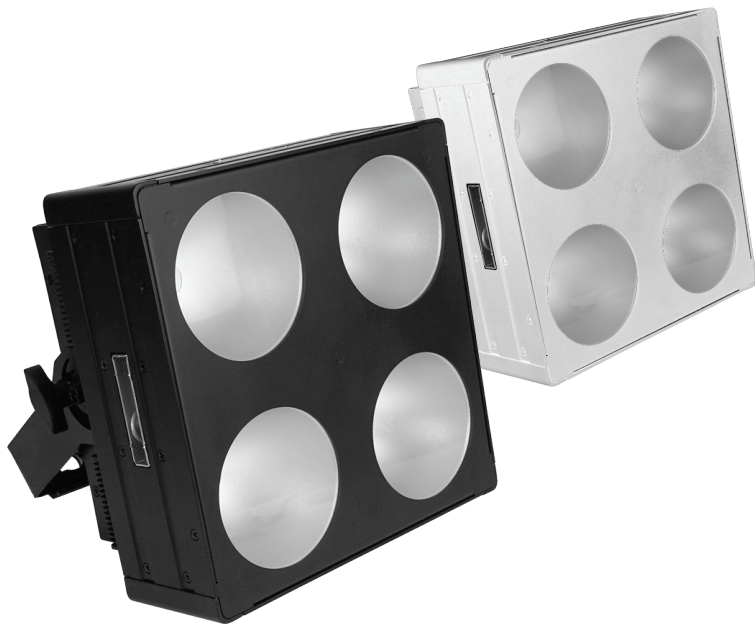

Coffin Latches



Lux @ 40°	PANX22				
	1.0m	2.0m	3.0m	4.0m	5.0m
R	770	200	100	60	45
G	1,735	460	215	126	85
B	380	100	45	27	18
CW	2,670	720	335	200	132
WW	2,070	560	255	153	100
Full	7,300	1,965	905	540	355

Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex key

