



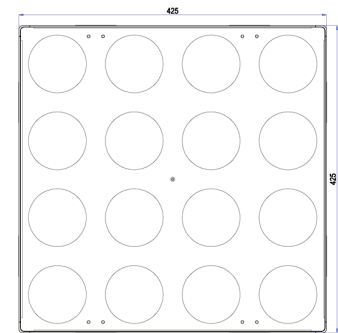


PANX44 / PANX44-WH

INDOOR PIXEL PANEL



Photometrics	
Light Source:	4 x 4 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	9,100 lux @ 2m full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
Effects	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
Power	
Power consumption:	400W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
Control	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 / 82
Interface:	3-pin and 5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
Housing	
Materials:	Aluminium, matte black or white finish
Cooling:	4 Fans
IP rating:	IP20
Dimensions:	425 x 425 x 141 mm
Net Weight:	10.7 kg
Rigging:	1x Omega bracket with 1/4 turn quick locks Coffin Latch - All Sides with Hex key (included)

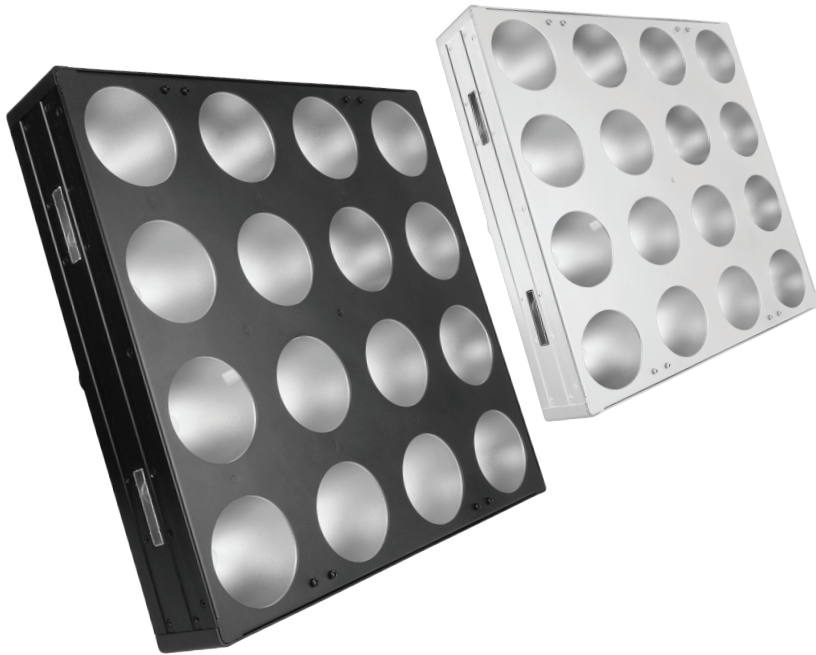

Lux @ 40°		PANX44				
	1.0m	2.0m	3.0m	4.0m	5.0m	
R	3,295	1,020	440	275	175	
G	6,925	2,120	990	590	390	
B	1,395	430	200	125	80	
CW	10,086	3,260	1,550	935	610	
WW	7,765	2,500	1,190	715	470	
Full	28,458	9,100	4,265	2,545	1,680	

Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex key

