


# PAR12X12L / PAR12X8L -[WH]

INDOOR LITE SERIES PAR



Photometrics	PAR12X12L / PAR12X12LW	PAR12X8L
Light Source:	12x 12W RGBW 6-in-1 LED	12x 8W RGBW 4-in-1 LED
Beam Angle:	40°	
Output:	2,580 lux @ 2.0 m full on	4,950 lux @ 2.0 m full on
PWM:	2,000 Hz	
Led lifespan:	50,000 hours	
<b>Effects</b>		
Dimming:	Dimming: 0-100%	
Strobe:	Strobe: 1 - 20 Hz	
<b>Power</b>		
Power consumption:	60W Max	60W Max
Input Voltage:	100-240V AC, 50/60Hz	
Connection:	IEC in/out	
<b>Control</b>		
Control Protocol:	DMX512	
DMX Channels:	6 / 11	4 / 9
Interface:	3-pin XLR in / out	
Operational Modes:	Modes: DMX, manual, auto, sound active, IR remote, master/slave	
Display	4-button and 4-digit LED control panel	
<b>Housing</b>		
Materials:	Die-cast aluminium, matte black or white finish	
Dimensions:	212 x 221 x 64 mm	
Cooling:	Fanless Cooling	
IP rating:	IP20	
Net Weight:	1.85 kg	
Optional accessories:	Carry bag PAR12LBAG	

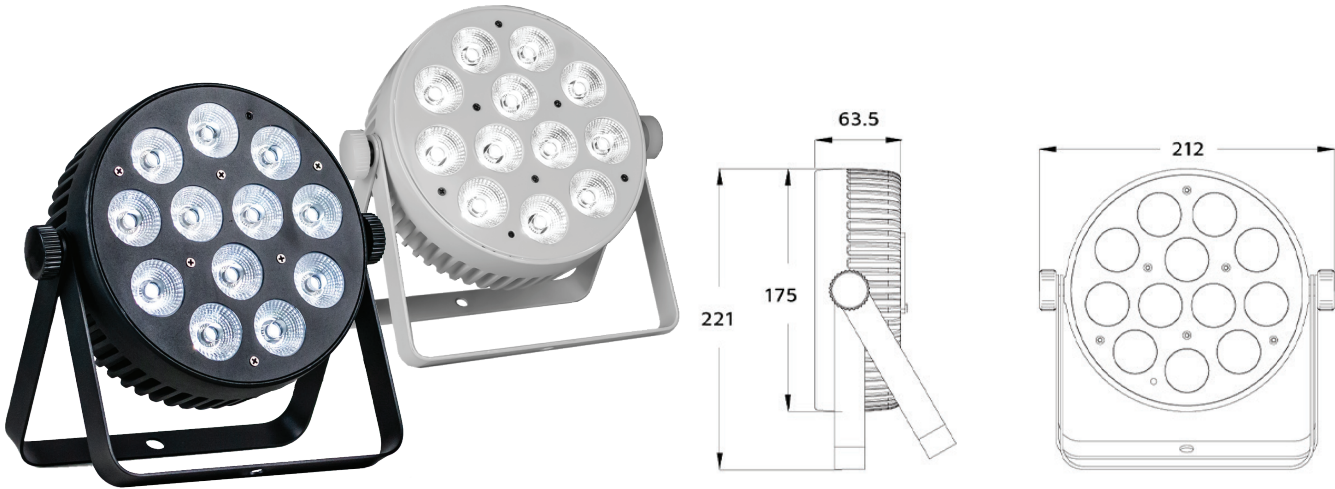

Lux @ 40°	PAR12X12L / PAR12X12LW				
	1.0m	2.0m	3.0m	4.0m	5.0m
<b>R</b>	1,445	409	180	93	70
<b>G</b>	2,030	570	250	130	95
<b>B</b>	2,910	882	270	171	126
<b>W</b>	2,420	734	322	171	126
<b>A</b>	850	258	120	66	46
<b>U</b>	840	264	120	66	49
<b>Full</b>	8,550	2,580	1,123	543	423

Lux @ 40°	PAR12X8L				
	1.0m	2.0m	3.0m	4.0m	5.0m
<b>R</b>	3,300	850	370	230	140
<b>G</b>	3,700	1,055	480	290	180
<b>B</b>	5,500	1,626	705	415	260
<b>W</b>	4,200	1,265	570	335	222
<b>Full</b>	13,800	4,950	1,960	850	700



IR Remote Included:



## Optional Accessories

### PAR12LBAG

Bag for 4pcs of PAR12L Series

