


PIXBAR12H

12x 12W RGBWAU Pixel Control Bar with barndoor



Lux @ 30°	PIXBAR12H				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.44	Ø0.87	Ø 1.33	Ø1.77	Ø2.22
R	913	375	190	119	87
G	1,194	486	250	156	113
B	1,157	468	240	154	109
W	1,706	678	351	219	158
A	673	257	135	189	67
U	290	116	59	36	26
Full	5,180	2,050	1,067	660	471

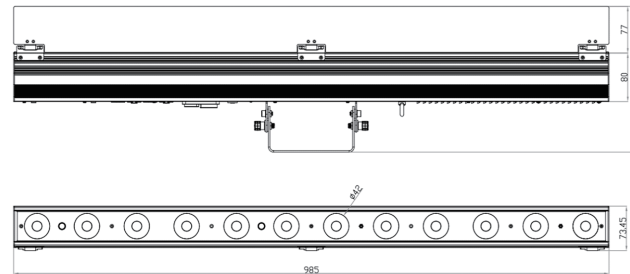

Frost filter included

Photometrics	PIXBAR12H
Light Source	12x 12W RGBWAU 6-in-1 LEDs
Beam Angle	30° (optional: 55°)
Output	2,050 lux @ 2 m RGBWAU full on
PWM	12,000 Hz
LED Lifespan	50,000 hours
Effects	
Dimming	4 x 16-bit Dimming Curves
Strobe	1-30 Hz
Power	
Input Voltage	100-240 V AC, 50/60 Hz
Power Consumption	150 W
Connection	True1 in/out
Control	
Operation Modes	DMX, manual, auto, sound active, master/slave, multi fixture chase
Control Protocol	DMX512
DMX Channels	3 / 4 / 4A / 8 / 12 / 24 / 72 / 74
Control Interface	3-pin and 5-pin XLR
Display	4-button LCD control panel
Housing	
Housing Materials	Aluminium
Housing Finish	Matte black
Barndoor	Included
Frost filter	Included
Cooling	Fanless cooling with temperature control
IP Rating	IP20
Net Weight	4.5 kg
Accessories	
Optional	Road Case: PIXBAR12CASE6WC

