



# PIXBAR12VW

12x 6W CV/WW/A Pixel Control Bar with barndoor

<b>Photometrics</b>	<b>PIXBAR12VW</b>
Light Source	12x 6W CW/WW/A 3-in-1 LEDs
Beam Angle	25° (optional: 8°, 15°, 50°)
Output	4,350 lux @2.0m full on
PWM	1,200 Hz
LED Lifespan	50,000 hours
<b>Effects</b>	
Dimming	5 dimming curves (Standard /Stage/TV/Architect /Theatre )
Strobe	1~30 Hz
<b>Power</b>	
Input Voltage	100~240 V AC, 50/60 Hz
Power Consumption	120 W
Connection	True1 in/out
<b>Control</b>	
Operation Modes	DMX, manual, auto, sound active, master/slave, multi fixture chase
Control Protocol	DMX512
DMX Channels	1 / 2 / 3 / 10 / 12 / 12P / 36 / 38
Control Interface	3-pin and 5-pin XLR
Display	4-button LCD control panel
<b>Housing</b>	
Housing Materials	Aluminium
Housing Finish	Matte black
Barndoor	Included
Frost filter	Included
Cooling	Fanless cooling with temperature control
IP Rating	IP20
Net Weight	4.5 kg
<b>Accessories</b>	
Optional	Road Case: PIXBAR12CASE6WC



Lux @ 25°	PIXBAR12VW				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.44	Ø0.87	Ø1.33	Ø1.77	Ø2.22
<b>CW</b>	4,400	1,850	1,090	680	513
<b>WW</b>	3,840	1,720	927	593	446
<b>A</b>	2,070	966	539	335	257
<b>Full</b>	10,050	4,350	2,320	1,565	1,180

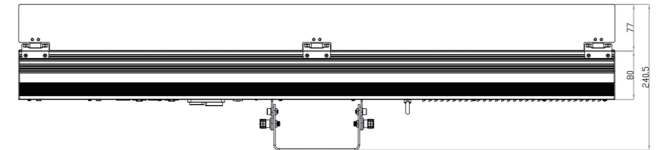

Frost filter included