


# PIXBAR12X8

12 x 8 W RGBW PIXEL CONTROL BAR

PIXBAR

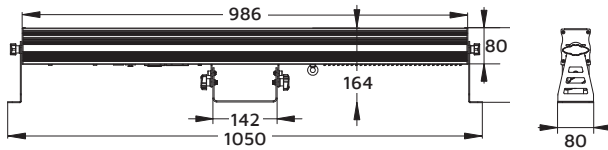

Lux	@ 22° PIXBAR12X8				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø0.39	Ø0.78	Ø1.17	Ø1.56	Ø1.94
<b>R</b>	1,540	640	335	215	145
<b>G</b>	1,432	590	320	206	140
<b>B</b>	1,515	664	370	240	169
<b>W</b>	1,930	850	480	310	210
<b>Full</b>	5,700	2,550	1,410	890	630

Lux	@ 55° PIXBAR12X8 optional				
	1.0m	2.0m	3.0m	4.0m	5.0m
	Ø1.04	Ø2.08	Ø3.12	Ø4.16	Ø5.21
<b>R</b>	534	183	98	62	41
<b>G</b>	1,000	354	195	127	81
<b>B</b>	430	160	80	60	40
<b>W</b>	1,219	438	230	144	101
<b>Full</b>	2,710	960	524	338	220

Photometrics		PIXBAR12X8
Light Source		12x 8 W RGBW 4-in-1 LEDs
Beam Angle		22° (optional: 55°)
Output		2,550 lux @ 2 m @ 22° full on
PWM		2,940 Hz
LED Lifespan		50,000 hours
Effects		
Dimming		0~100%, 8-bit + 4x 16-bit dimming curves
Strobe		1~30 Hz
Power		
Input Voltage		100~240 V AC, 50/60 Hz
Power Consumption		120 W
Connection		IEC in/out
Control		
Operation Modes		DMX, manual, auto, sound active, master/slave, multi fixture chase
Control Protocol		DMX512
DMX Channels		4/6/8/9/12/16/24/48/50
Control Interface		5-pin XLR
Display		4-button LCD control panel
Housing		
Housing Materials		Aluminium
Housing Finish		Matte black
Cooling		Fanless cooling with temperature control
IP Rating		IP20
Net Weight		4.5 kg
Accessories		
Optional		Road Case: PIXBAR12CASE6WC

