


PS300LEWW/PS200LEFC/PS200LEV



VARIABLE WHITE / WARM WHITE / RGBL LED PROFILE

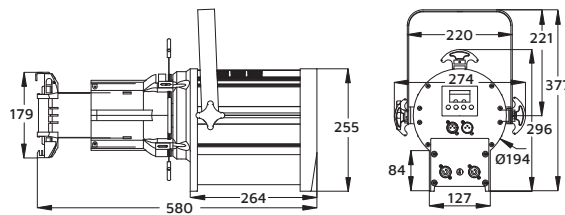

Photometrics	PS200LEV	PS300LEWW	PS200LEFC
Type	200 W Variable Colour Temperature Profile Spot	300 W Warm White Profile Spot	200W RGBL LED Profile Spot
Light Source	350 W, 3,200 and 5,600 K COB LED, CRI: 95+	300 W, 3,200 K COB LED, CRI: 90+	200W RGBL
Beam Angle	19°, 26° or 36°	19°, 26° or 36°	19°, 26° or 36°
Output	3,200 K: 2,413 lux @ 5 m @ 19° 5,600 K: 3,922 lux @ 5 m @ 19°	4,822 lux @ 5 m @ 19° 8,000 Hz	8,000 Hz
PWM	8,000 Hz	50,000 hours	50,000 hours
LED Lifespan	50,000 hours		
Effects			
Dimming	0~100%, 16-bit	0~100%, 16-bit	0~100%, 16-bit
Strobe	1~25 Hz	1~25 Hz	1~25 Hz
Gobo Holder Size	"B" – 87.5 mm, 35 mm image size	"B" – 87.5 mm, 35 mm image size	"B" – 87.5 mm, 35 mm image size
Power			
Input Voltage	100~240 V AC, 50/60 Hz, 200 W	100~240 V AC, 50/60 Hz, 200 W	100~240 V AC, 50/60 Hz, 200 W
Connection	NEUTRIK® powerCON in/out	NEUTRIK® powerCON in/out	NEUTRIK® powerCON in/out
Control			
Operation Modes	DMX, manual, master/slave	DMX, manual, master/slave	DMX, manual, master/slave
Control Protocol	DMX512	DMX512	DMX512
DMX Channels	2/3	1/2/3	2/3
Control Interface	3-pin XLR (optional: 5-pin XLR)	3-pin XLR (optional: 5-pin XLR)	3-pin XLR (optional: 5-pin XLR)
Display	4-button LCD control panel	4-button LCD control panel	4-button LCD control panel
Housing			
Housing Materials	Aluminium and ABS, matte black finish	Aluminium and ABS, matte black finish	Aluminium and ABS, matte black finish
Cooling	Sensor thermostat controlled variable speed fan	Sensor thermostat controlled variable speed fan	Sensor thermostat controlled variable speed fan
IP Rating	IP20	IP20	IP20
Net Weight	10 kg	9.5 kg	10 kg
Accessories			
Included	Gel Frame	Gel Frame	Gel Frame
Optional	IRIS: PSIRIS	IRIS: PSIRIS	IRIS: PSIRIS
	Lens: PSLII36, PSLII26, PSLII19	Lens: PSLII36, PSLII26, PSLII19	Lens: PSLII19, PSLII26, PSLII36, PSLII1526, PSLII2636

PS200LEV LUX CHART

Lux	5.0m			8.0m			10.0m		
	19°	26°	36°	19°	26°	36°	19°	26°	36°
3,200 K	Ø1.67	Ø2.68	Ø3.35	2,413	991	612			
5,600 K	3,922	1,548	995						
3,200 K	Ø2.31	Ø3.69	Ø4.62	1,280	520	320			
5,600 K	2,080	812	520						
3,200 K	Ø3.25	Ø5.20	Ø6.50	641	263	162			
5,600 K	1,042	411	263						

PS300LEWW LUX CHART

Lux	5.0m			8.0m			10.0m		
	19°	26°	36°	19°	26°	36°	19°	26°	36°
19°	Ø1.67	Ø2.68	Ø3.35	4,822	1,885	1,205			
26°	Ø2.31	Ø3.69	Ø4.62	4,465	1,745	1,116			
36°	Ø3.25	Ø5.20	Ø6.50	4,192	1,247	798			

Accessories

GOBO HOLDER

Included

'B' 87.5 mm overall size, 35 mm image size

