




WIP1320

1320X 0.8 W IP65 RGBW STROBE LIGHT WITH 6-SECTION CONTROL

EVENT LIGHTING

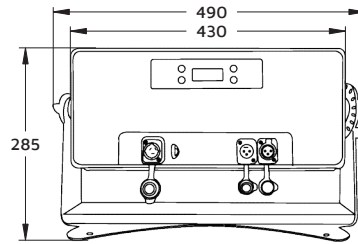

Photometrics	WIP1320
Light Source	1320x 0.8 W SMD5050 RGBW LEDs
Beam Angle	120°
Output	2,200 lux @ 3 m
PWM	5,000 Hz
LED Lifespan	50,000 hours
Effects	
Dimming	0~100%, 8-bit
Strobe	0.5~25 Hz
Power	
Input Voltage	100~240 V AC, 50~60 Hz, 1,150 W
Connection	True1 in
Control	
Operation Modes	DMX, auto, manual, master/slave
Display	4-button LCD control panel
Control Protocol	DMX512
DMX Channels	4/5/7/13/15/31
Control Interface	3-pin XLR
Housing	
Housing Materials	Die-cast aluminium, matte black finish
IP Rating	IP65
Cooling	Thermostat controlled fan
Net Weight	10.1 kg
Rigging	2x omega brackets with 1/4 turn quick locks

Lux @ 120°		WIP1320				
		1.0m	2.0m	3.0m	4.0m	5.0m
R		2,100	585	250	160	120
G		4,050	1,000	500	320	230
B		5,300	1,400	700	430	310
W		6,000	1,500	750	470	340
Full		14,500	4,400	2,200	1,400	1,000



Lithgow Silos - DC Electric Custom Circuits