




FXTUBEPK

Tube Set with 6 LED Effects Tubes and Carry Bag.

MANUAL

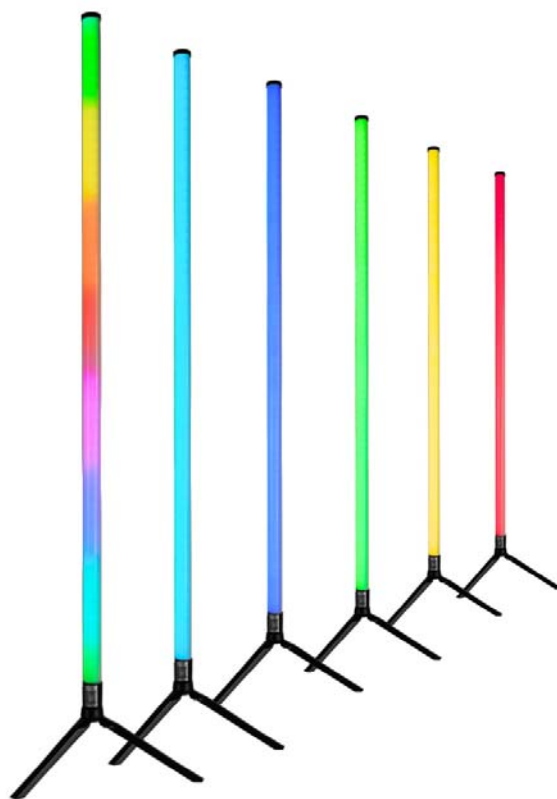

For safety, please read this user manual carefully before initial use.

Event Lighting reserves the right to revise the manual at any time. Information and specifications within this manual are subject to change without notice. Event Lighting assumes no liability or responsibility for any errors or omissions. Please consult Event Lighting for any clarification or information regarding this item.

Version: 1.0 (17.04.2025)

Power Input

This LED lamp features a **USB-C socket** for power connection. A **USB to USB-C cables** are included for your convenience.

Compatible Power Sources:

You can use any device with a USB interface, such as:

- USB chargers
- Power banks
- Mobile phones
- Computer USB ports

Operating the Lamp

Once connected to a power source, the lamp will turn on automatically and begin a **default 7-color cycle mode**.

Control Methods

You can operate the lamp in three ways:

1. **Manual Button Control**
 - **Single Press:** Switch between different lighting modes.
 - **Press & Hold (3 seconds):** Turn the lamp **ON/OFF**.



2. Remote Control (Infrared)

Use the included remote control to select your desired function.




Remote buttons:

- | | | | |
|----|-----------------------------|----|--------------------|
| 1 | ON / OFF | 13 | Single colour |
| 2 | White | 14 | RGB |
| 3 | LED quantity selection | 15 | 7 colours |
| 4 | AUTO colour change | 16 | Colour jump |
| 5 | UP and DOWN opening mode | 17 | 16 colours |
| 6 | UP and DOWN closing mode | 18 | Flow mode |
| 7 | Energy / Flutter mode | 19 | Mic. voice control |
| 8 | SPEED/BRIGHTNESS - increase | 20 | Running mode |
| 9 | SPEED/BRIGHTNESS - decrease | 21 | Trailing |
| 10 | Flashing mode | | |
| 11 | Running mode | | |
| 12 | Running mode | | |

3. Smartphone App Control

- Download the companion Miracles Star app and enable **Bluetooth** on your phone.
- Turn on the LED lamp to connect.

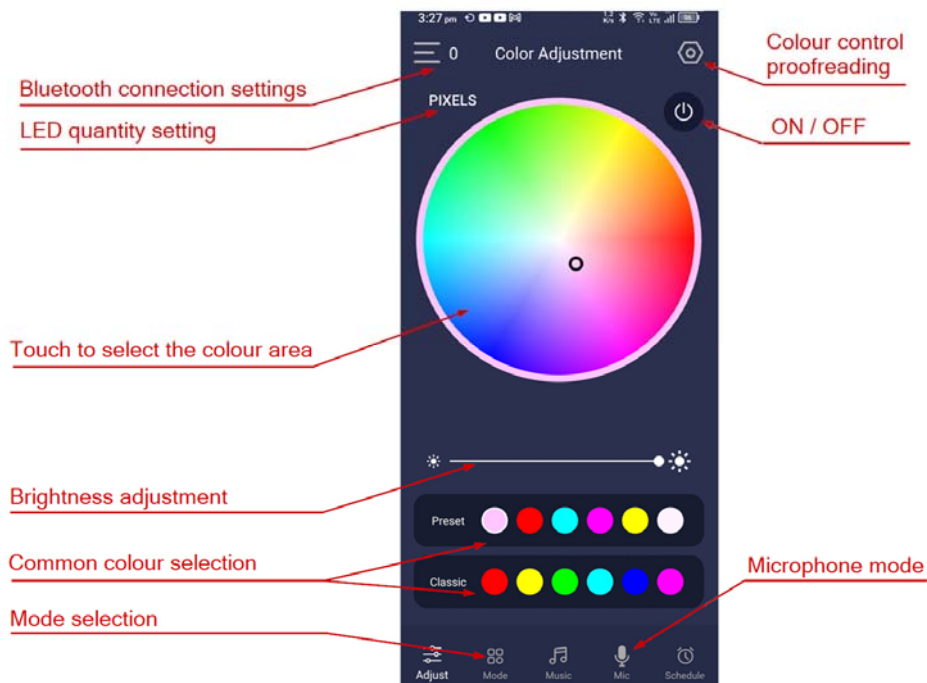

App Features:

- **Bluetooth Status Indicator (Top Left):**
 - "0" = Disconnected (tap to connect manually).
 - "1" = Connected (supports controlling multiple lamps simultaneously).
- **Color Sequence Setting (Top Right – Hexagon Icon):**
 - Default: RGB mode. Adjust if colors appear mismatched.
- **LED Quantity Setting:**
 - **Desktop Model (50cm): Enter 20.**
 - **Floor Lamp Model (110cm): Enter 60.**
(Required for synchronized color changes across multiple lamps.)
- **Lighting Modes:**
 - Choose from dozens of colors & dynamic effects.
 - Adjust speed & brightness to your preference.
- **Microphone Mode:**
 - Syncs colors to ambient sound rhythms.
 - Customize sensitivity and response modes.

Technical Specifications

- Operation Modes: Manual, Remote Control, Mobile Application Control via Bluetooth
- Input Voltage: 5V DC
- Power consumption: 10W (each unit)
- Package dimensions: 1390 x 165 x 105mm
- Weight of the package: 2.8 kg

Warranty

Please contact your local dealer or contact Event Lighting.

www.event-lighting.com.au