
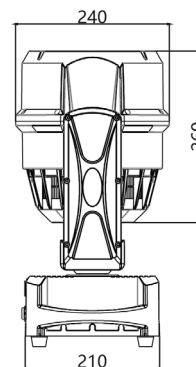


DELUGEM7X60WFX


IP65 WASH MOVING HEAD

EVENT
LIGHTING

MOVING HEADS

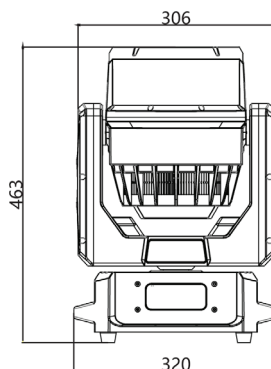

Photometrics	
Light Source	7 x 60W RGBW LEDs ; 28 x 0.5W RGB LEDs
Beam Angle	3°~45°
Output	2,700 lumen@ 3° 3,207 lumen@ @ 32°
LED Lifespan	50,000 hours
Effects	
Dimming	0~100%, 16 bit
Pixel Control	Yes
Aura LEDs Effects	Yes
Strobe	Yes
Zoom	Motorised, 3°~45°
Movement	
Pan	540°
Tilt	205°
Power	
Input Voltage	100~240 V AC, 50/60 Hz, 700 W
Connection	IP65 True1 in/out
Control	
Operation Modes	DMX, auto, sound active, master/slave
Control Protocol	DMX, RDM, ArtNet, sACN
DMX Channels	28 / 49 / 105 / 127
Control Interface	5-pin DMX in/out, RJ45 in / out
Display	Full colour 180° reversible LCD control panel
Software	Upgradable via RJ45
Housing	
Housing Materials	ABS and steel, matte black finish
IP Rate	IP65
Rigging	2 x Omega brackets included
Net Weight	12 kg

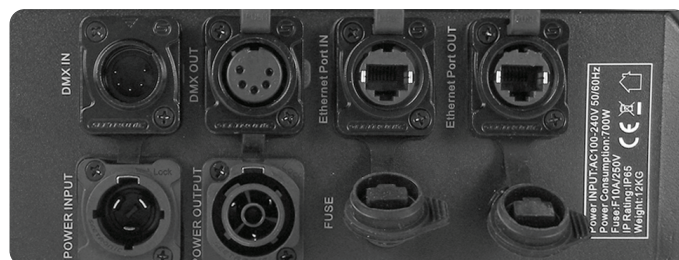

Lux				
	2.0m	4.0m	6.0m	8.0m
@ 3°	Ø0.1	Ø0.2	Ø0.4	Ø0.5
Full	141,641	35,410	15,738	8,853
Lux				
	2.0m	4.0m	6.0m	8.0m
@ 32°	Ø1.2	Ø2.3	Ø3.5	Ø4.6
Full	2,922	731	325	183

Road Case (Optional)

DEL7X60CASE4
Road case to suit 4 units
of DELUGEM7X60WFX



DELUGEM7X60WFX