


PANX21 / PANX21-WH

INDOOR PIXEL PANEL



Photometrics	
Light Source:	2 x 1 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	1,066 lux @ 2m full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
Effects	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
Power	
Power consumption:	50W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
Control	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 / 12
Interface:	5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
Housing	
Materials:	Aluminium, matte black or white finish
Cooling:	Fanless
IP rating:	IP20
Dimensions:	213 x 168 x 197 mm
Net Weight:	2.5 kg
Rigging:	1x Omega bracket with 1/4 turn quick locks Coffin Latch - Top+Bottom with Hex key (included)

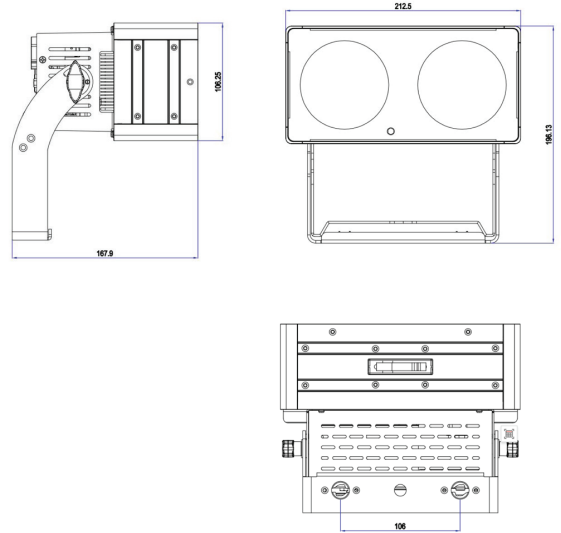

Coffin Latches



Lux @ 40°		PANX21				
		1.0m	2.0m	3.0m	4.0m	5.0m
R		476	111	50	30	20
G		1,000	250	120	65	45
B		201	50	22	15	5
CW		1,500	390	175	100	65
WW		1,134	300	130	76	50
Full		4,137	1,066	485	275	180

Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex key

