


GOBO30

30W GOBO PROJECTOR WITH IR REMOTE



GOBO30	
Photometrics	Light Source: 30W White LED Beam Angle: 15°-25° PWM: 1,500 Hz LED Lifespan: 50,000hours
Gobo	Interchangeable gobos - 27mm outer diameter
Effects	Dimming: 0-100%, 16-bit dimming Strobe: Variable electronic strobe
Power	Input Voltage: 100~240V AC, 50/60Hz Power Consumption: 35W Connection: powerCON in
Control	Protocol: DMX512 Operation modes: DMX, manual, auto, master/slave, IR Remote. DMX Channels: 2/3/4 Interface: 3-pin XLR Male, 3-pin XLR Female Display: 4-button 2.4inch TFT LCD display control panel
Housing	Materials: Metal and flame retardant ABS Finishing: Matte black IP rating: IP20 Cooling: Fanless Net Weight: 3.2kg Dimensions: 256 x 193 x 248 mm

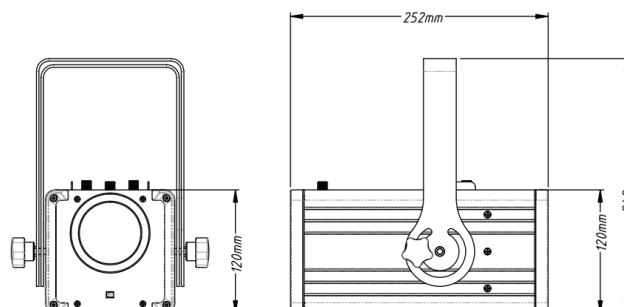

Lux Chart @15°				
Distance	1.0m	3.0m	5.0m	7.0m
Diameter	Ø0.26	Ø0.79	Ø1.32	Ø1.84
Lux	23,910	2,785	1,009	529

Lux Chart @25°				
Distance	1.0m	3.0m	5.0m	7.0m
Diameter	Ø0.54	Ø1.61	Ø2.68	Ø3.75
Lux	12,308	2,397	547	278



IR Remote Included:

