


HAVOCW19X40 [-WH]

WASH MOVING HEAD

EVENT
LIGHTING

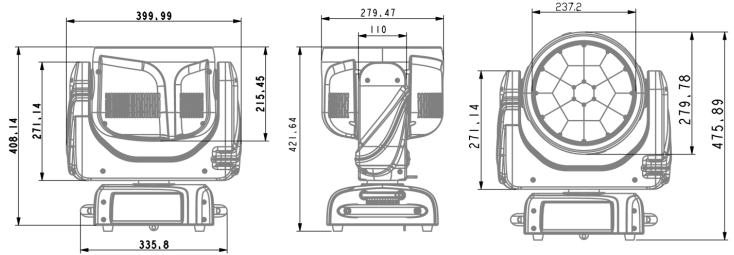

Photometrics

Light Source 19x OSRAM 40W RGBW 4-in-1 LEDs

Beam Angle 5°~45°

Output 107,431 lux@ 3m @ 5°

2,355 lux@ 3m @ 45°

Control: Remote on/off via DMX

LED Lifespan 60,000 hours

Effects

Dimming 0~100%

Pixel Control Yes

Strobe Yes

Zoom Motorised, 5°~45°

Movement 16-bit auto reposition

Pan 630° (2.2s) / 540° (2.0s)

Tilt 265° (0.85s)

Power

Input Voltage 100~240 V AC, 50/60 Hz, 231 W

Connection Neutrik @ powerCON in/out

5 pin DMX in/out, 3 pin DMX in/out

Control

Operation Modes DMX, auto, sound active, master/slave

Control Protocol DMX512, RDM, optional Art-Net, optional CRMX

DMX Channels 19/98/18/20

Control Interface 3-pin & 5-pin XLR in/out

Display 2.4" colour LCD control panel, with battery

Software Upgradable via DMX

Housing

Housing Materials ABS and steel, matte black or white finish

Cooling Multi-sensor thermostat controlled
variable speed fan

Net Weight 20.9 kg

Rigging Omega bracket & safety chain



Lux @ 5°

	3.0m	5.0m	7.0m
	Ø0.19	Ø0.31	Ø0.44
R	5,540	2,000	880
G	10,300	3,740	1,690
B	2,130	781	352
W	16,000	5,870	2840
Full	110,621	39,823	20,318

Lux @ 45°

	3.0m	5.0m	7.0m
	Ø2.0	Ø3.33	Ø4.67
R	536	191	96.6
G	966	354	164
B	199	72.3	32.7
W	1,440	529	241
Full	2355	847.9	432.6



Road Case (Optional)

HAVOCW19X40CASE2
Road case to suit 2 units
of HAVOCW19X40

