


# PANX41 / PANX41-WH

## INDOOR PIXEL PANEL



<b>Photometrics</b>	
Light Source:	4 x 1 40W RGB+CW+WW COB LEDs
Beam Angle:	40°
Field Angle:	60°
Output:	1,930 lux @ 2m full on
PWM:	1,200 Hz
Led lifespan:	50,000 hours
<b>Effects</b>	
Dimming:	5 x 16-bit Dimming Curves
Strobe:	1~25 Hz
<b>Power</b>	
Power consumption:	120W Max
Input Voltage:	100~240 V AC, 50/60 Hz
Connection:	True1 in/out
<b>Control</b>	
Control Protocol:	DMX512, optional WDMX
DMX Channels:	1 / 2 / 3 / 4CW / 4WW / 8 / 11 / 22
Interface:	5-pin XLR in/out
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase, WDMX (optional)
Display	4-button LCD control panel
Software Upgrade via DMX:	Yes
<b>Housing</b>	
Materials:	Aluminium, matte black or white finish
Cooling:	Fanless
IP rating:	IP20
Dimensions:	425 x 197 x 183 mm
Net Weight:	4.3 kg
Rigging:	1x Omega bracket with 1/4 turn quick locks Coffin Latch - Top+Bottom with Hex key (included)

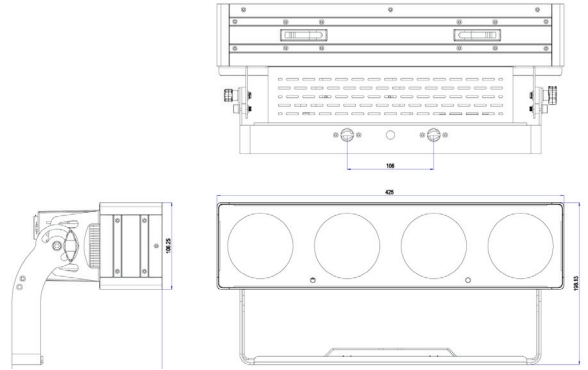

Lux @ 40°		PANX41				
	1.0m	2.0m	3.0m	4.0m	5.0m	
<b>R</b>	833	210	100	60	40	
<b>G</b>	1,645	460	210	130	90	
<b>B</b>	340	95	45	30	20	
<b>CW</b>	2,470	700	320	190	130	
<b>WW</b>	1,920	540	250	150	100	
<b>Full</b>	6,870	1,930	880	520	355	

### Rigging Accessories (Included)

Omega bracket with 1/4 turn quick locks

Hex key

