



# PAR19X12L [-WH]

INDOOR LITE SERIES PAR

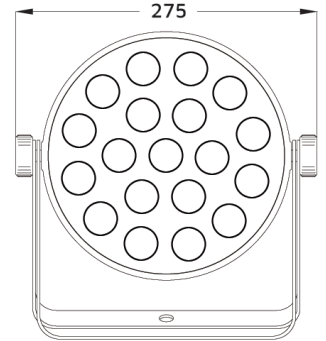

<b>Photometrics</b>	
Light Source:	19x 12W RGBWU 6-in-1 LEDs
Beam Angle:	40°
Output:	3,310 lux @ 2.0 m full on
PWM:	20,000 Hz
Led lifespan:	50,000 hours
<b>Effects</b>	
Dimming:	0~100%
Strobe:	1~20 Hz
<b>Power</b>	
Power consumption:	100W Max
Input Voltage:	100V~240 V AC, 50/60Hz
Connection:	powerCON in/out
<b>Control</b>	
Control Protocol:	DMX512
DMX Channels:	6 / 11
Interface:	3-pin XLR in / out
Operational Modes:	DMX, manual, auto, sound active, IR remote, master/slave
Built-in Programming:	Yes
Display:	4-button and 4-digit LED control panel
<b>Housing</b>	
Materials:	Die-cast aluminium, matte black or white finish
Dimensions:	275 x 270 x 84 mm
Cooling:	Fanless Cooling
IP rating:	IP20
Net Weight:	2.8 kg

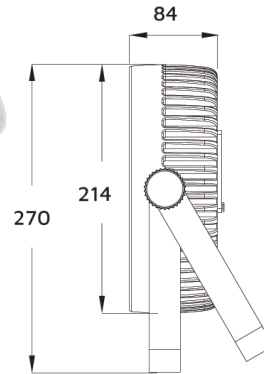

Lux @ 40°						
	1.0m	2.0m	3.0m	4.0m	5.0m	
R	2,850	650	290	162	107	
G	4,310	1,112	495	286	180	
B	6,290	1,340	670	385	250	
W	4,850	1,278	598	349	230	
A	705	170	82	43	32	
U	2,460	695	325	186	124	
Full	12,730	3,310	1,436	845	545	



IR Remote Included:



## Optional Accessories

### PAR19LBAG

Bag for 2pcs of PAR19L Series Par with clamps

