
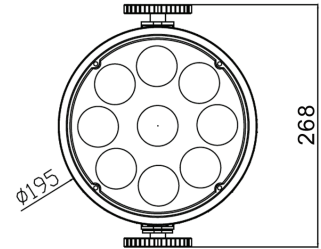


PAR9X12H-IP [-WH]

OUTDOOR PRO PAR

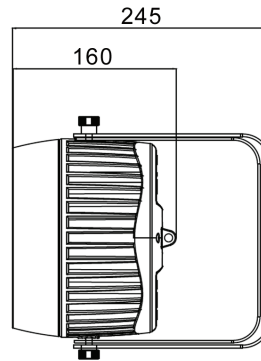

Photometrics

Light Source: 9x 12 W RGBWU LED
 Beam Angle: 25°
 Output: 2,840 lux @ 2.0 m full on
 PWM: 20,000 Hz
 Led lifespan: 50,000 hours

Effects

Dimming: 0-100%
 Strobe: 1-20 Hz

Power

Power consumption: 72W Max
 Input Voltage: 100V-240 V AC, 50/60Hz
 Connection: True1 in/out

Control

Control Protocol: DMX512, optional WDMX
 DMX Channels: 6 / 10
 Interface: 5-pin XLR in / out

Operational Modes: DMX, manual, auto, sound active, master/slave

Built-in Programming: 4 built-in auto modes

Display: OLED touch display with glass buttons

Housing

Materials: Die-cast aluminium, matte black or white finish
 Dimensions: 268 x 195 x 245 mm
 Cooling: Fanless Cooling
 IP rating: IP65
 Net Weight: 3.9kg



Lux @ 25°

	1.0m	2.0m	3.0m	4.0m	5.0m
R	1,750	428	186	109	71
G	3,120	738	340	188	120
B	3,320	756	350	194	125
W	4,230	960	446	252	162
A	724	168	80	46	32
U	1,020	225	115	65	43
Full	12,510	2,840	1,330	710	490

Road Case (Optional)

PAR9CASEWC
 Road Case to suit 6 units
 of PAR9X12H-IP Parcans

