


# PIXBAR12 H / VW -[WH]

INDOOR PIXEL BAR

EVENT  
LIGHTING

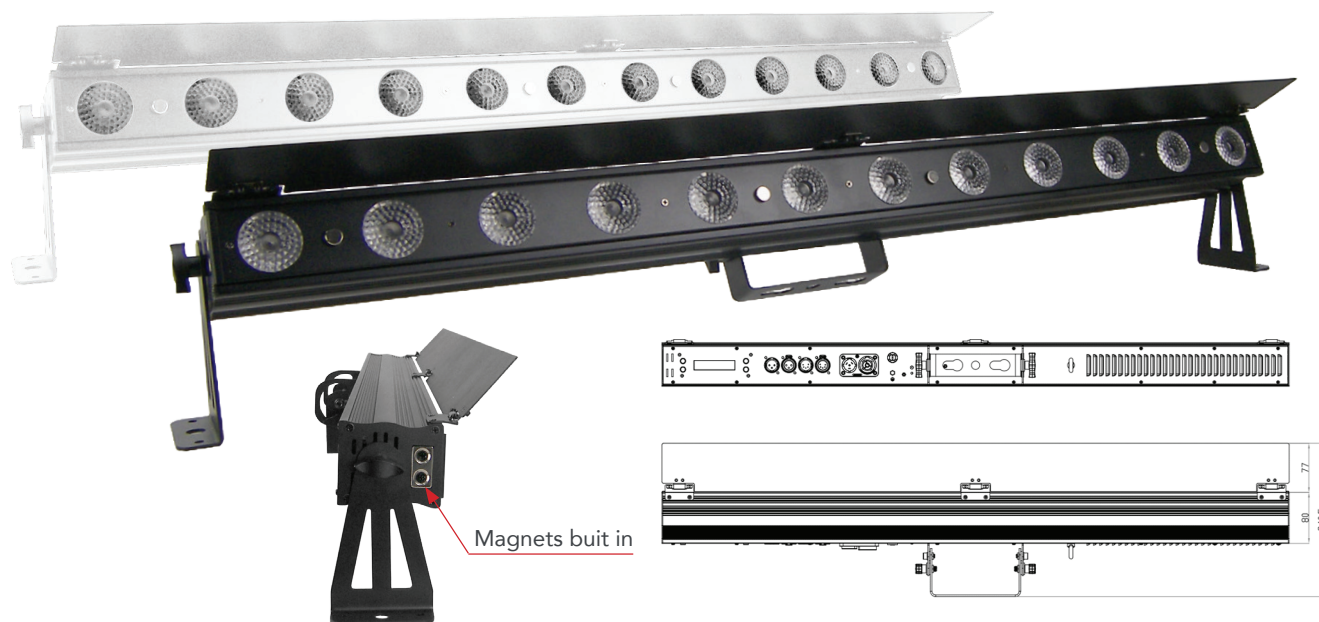

Photometrics	PIXBAR12H	PIXBAR12VW
Light Source:	12x 12 W RGBWAW LED	12 x 6W CW/WW/A LED
Beam Angle:	30° (optional: 55°)	25° (optional: 8°, 15°, 50°)
Output:	2,050 lux @ 2.0 m full on	4,350 lux @ 2.0 m full on
PWM:		12,000 Hz
Led lifespan:		50,000 hours
<b>Effects</b>		
Dimming:	4 x 16-bit Dimming Curves	
Strobe:	1~30 Hz	
<b>Power</b>		
Power consumption:	150W Max	75W Max
Input Voltage:	100~240 V AC, 50/60 Hz	
Connection:	True1 in/out	
<b>Control</b>		
Control Protocol:	DMX512, optional WDMX	
DMX Channels:	3 / 4 / 4A / 8 / 12 / 24 / 72 / 74	1 / 2 / 3 / 10 / 12 / 12P / 36 / 38
Interface:	3-pin and 5-pin XLR in/out	
Operational Modes:	DMX, manual, auto, sound active, master/slave, multi fixture chase	
Display	4-button LCD control panel	
<b>Housing</b>		
Materials:	Aluminium, matte black or white finish	
Dimensions:	1050 x 165 x 80 mm	
Cooling:	Fanless Cooling	
IP rating:	IP20	
Net Weight:	4.5 kg	
Accessories included:	Frost filter, Barn door	



Lux @ 30°	PIXBAR12H				
	1.0m	2.0m	3.0m	4.0m	5.0m
<b>R</b>	913	375	190	119	87
<b>G</b>	1,164	486	250	156	113
<b>B</b>	1,157	468	240	154	109
<b>W</b>	1,706	678	351	219	158
<b>A</b>	673	257	135	189	67
<b>U</b>	290	116	59	36	26
<b>Full</b>	5,180	2,050	1,067	660	471

Lux @ 30°	PIXBAR12Q				
	1.0m	2.0m	3.0m	4.0m	5.0m
<b>R</b>	1,540	640	335	215	145
<b>G</b>	1,432	590	320	206	140
<b>B</b>	1,515	664	370	240	169
<b>W</b>	1,930	850	480	310	210
<b>Full</b>	5,700	2,550	1,410	890	630

Lux @ 25°	PIXBAR12VW				
	1.0m	2.0m	3.0m	4.0m	5.0m
<b>CW</b>	4,400	1,850	1,090	680	513
<b>WW</b>	3,840	1,720	927	593	446
<b>A</b>	2,070	966	539	335	257
<b>Full</b>	10,050	4,350	2,320	1,565	1,180

ACCESSORIES INCLUDED: • Barn Door • Frost Filter



## Road Case (Optional)

**PIXBAR12CASE6WC**  
Road Case to suit 6 pcs  
PIXBAR12 including  
clamps

